



CITY OF MANCHESTER
PLANNING AND COMMUNITY DEVELOPMENT

Planning and Zoning
Building Regulation
Code Enforcement
Community Improvement Program

Jeffrey D. Belanger, AICP
Director

Nicola Strong
Deputy Director, Planning & Zoning

Michael J. Landry, PE, Esq.
Deputy Director, Building Regulations

August 31, 2026

Jonathan and Krystal Venturini (Owner)
374 Thornton Street
Manchester, NH 03102

Joseph M. Wichert, LLS, Inc.
802 Amherst Street
Manchester, NH 03104

RE: ZBA2026-080, 374 Thornton Street, B-1

Zoning Relief Required for Subdivision

Your application for a permit dated **August 14, 2026** to **subdivide a lot to create one new buildable lot** where proposed Lot 48 will remain improved with a single-family dwelling and detached garage with 13,040 SF of buildable lot area, and where proposed Lot 48B will have 13,955 SF of gross lot area, but only 1,812 SF of buildable land area due to steep slopes where 6,000 SF is required in the MX-1 Zoning District, all as per documents submitted through **August 14, 2026** and with non-compliance listed in the Zoning Review dated **August 24, 2026** is hereby acknowledged.

According to Section(s) **5.3.1.B.3.G Minimum Buildable Lot Area for Lot 48B** of the Zoning Ordinance of the City of Manchester, New Hampshire, passed to be ordained on March 1, 2026, this is prohibited. Consequently, I have no authority to grant this permit. Permit is hereby DENIED.

Required Action(s): Subdivision Approval

Further proceedings contemplated pertaining to this application must be pursuant to NH Revised Statutes Annotated 674:33 or the other statutory provisions relative to Zoning Boards of Adjustment, as may be appropriate.

Michael J. Landry, PE, Esq.
Deputy Director, Building Regulations

374 Thornton St.

K-2

E....#645....'79....Sylvio Leblanc

H....#138-99....3/2/99....Tom Robinson Plumbing...Peter
DePrisco

ZONING REVIEW

Reviewed By:	Jim Tierney	Date:	Wednesday, August 19, 2026		
Revised By:	Glenn Gagne	Date Revised:	24-Aug-26		
Applicant Name:	Joseph Wichert (Agent)	Submission Date:	08/14/2026	Map / Lot:	389 / 48 B
Street Address:	374 Thornton Street (Lot 48 B)	Street Status:		Alley Access:	NO
Secondary Frontages (if any):				Ward:	11
Base Zone:	MX-1 (Mixed-Use - Neighborhood)				
Building Type:	Duplex				
Overlay District:	None				

Planning Department / Board Action

- ☐ Site Plan
☒ Subdivision
☐ Planned Development
☐ Conditional Use Permit
☐ Voluntary Merger

Additional Overlays

- ☐ Airport Approach
☐ Airport Noise
☐ Airport Navigational Hazard
☐ FEMA Flood Plain

Additional Review Required

- ☐ Conservation Commission
☐ Regional Impact
☐ Heritage Commission

Dimensions	Existing	Proposed
Area of Lot (Square Feet)	28,202	13,955 - 12,143 (slopes) = 1,812
Area of Building on Lot (Square Feet)	1,331	1,248
Number of Stories	1.75	2
Total Area of All Floors (Square Feet)	2,022	2,828

Article 4 Uses	Permitted Per	Not Permitted Per	Remarks
☐ Two-Family	4.3-A.1-B		OK
☐			
☐			
☐			

Article 4 Additional Requirements Per Use	Section	Permitted/ Required	Proposed/ Existing	Remarks
☐				
☐				
☐				
☐				
☐				
☐				
☐				
☐				

Article 5			Section	Permitted/ Required	Proposed/ Existing	Remarks
Dimensional Requirements						
☐	Minimum Lot	Front-Loaded	5.3.1.B.3.A	60 ft.	85 ft.	OK - Unimproved section 36.28'
☐	Width	Alley-Loaded	5.3.1.B.3.A	50 ft.		
☐	Maximum Lot Width at Frontage		5.3.1.B.3.A	150 ft.	85 ft.	OK
☐	Lot Depth		5.3.1.B.3.B	100 ft.	115 ft.	OK
☐	Front/Street	Minimum	5.3.1.B.3.C	10 ft.	18 ft.	OK
☐	Yard Setback	Maximum	5.3.1.B.3.C	20 ft.		
☐	Minimum Combined Side Yard Setback		5.3.1.B.3.D	20 ft.	65 ft.	OK
☐	Minimum Setback of One Side		5.3.1.B.3.E	5 ft.	15 ft.	OK
☐	Minimum Rear Yard Setback		5.3.1.B.3.F	20 ft.	47 ft.	OK
☒	Minimum Buildable Lot Area		5.3.1.B.3.G	6,000 SF / 5,000 SF	1,812 SF	N/C
☐	Maximum Lot Coverage		5.3.1.B.3.H	70%	22%	OK
☐	Uses Within Floors	First Floor	5.3.1.B.4.A	Residential	Residential	OK
☐		Upper Floors	5.3.1.B.4.A	Residential	Residential	OK
☐	Maximum Number of Dwelling Units per Building		5.3.1.B.4.B	2	2	OK
☐	Additional Lot Area Required for Residential Uses		-	N/A		
☐	Max. Impervious Surface, Front Yard		5.3.1.B.7.D.	25%	*25%	OK - *Driveway not full width of garage.
☐	Specific Standards		5.3.1.B.7			
☐	Other					

Article 5 Height Requirements		Section	Permitted/ Required	Proposed/ Existing	Remarks
☐	Minimum Height in Stories	5.3.1.B.5.A	1 Story	2 Stories	OK- Not more than 6' above grade plane.
☐	Maximum Height in Stories	5.3.1.B.5.B	2.5 Stories		
☐	Maximum Height in Feet	5.3.1.B.5.C	35 ft.	33.5 ft	OK
☐	Minimum First Story Height	-	N/A		N/A

Article 5 Street Façade Requirements		Section	Permitted/ Required	Proposed/ Existing	Remarks
☐	Entrance Type	5.4.2.A	Porch, Recessed Porch, Step, Recessed Entry	Step	OK
☐	Street Façade Elements	5.4.2.B	N/A	N/A	
☐	Minimum Transparency per Façade	First Story - Primary	5.3.1.B.6.A	10%	
☐		First Story - Secondary	5.3.1.B.6.A	10%	
☐		Upper Stories	5.3.1.B.6.A	10%	
☐	Blank Wall Limitations	Primary Façade	5.3.1.B.6.B	15ft. max.	See Plan
☐		Secondary Façade	5.3.1.B.6.B	15ft. max.	N/A
☐	Number of Street Entrances	5.3.1.B.6.D	Min. 1 entrance per unit	2	OK
☐	Roof Types	5.4.6.E	Pitched	Pitched	OK
☐	Façade Variety	5.4.6.F	Not Required	N/A	
☐	Building Materials	-	N/A		

Article 5 Accessory Structures		Section	Permitted/ Required	Proposed/ Existing	Remarks
☐	Setback	Front/Street Yards	10 ft.	Existing	OK - Existing garage TBR
☐		Side Yard	Match Primary Structure	None	OK
☐		Rear Yard	4 ft.	None	OK
☐	Height	Side Yard			
		Rear Yard			
☐	Size Limits	Side Yard			
		Rear Yard			
☐	Special Requirements	5.6			

Article 7 Parking Requirements		Section	Permitted/ Required	Proposed/ Existing	Remarks
☐	Surface Parking Location	5.3.1.B.3.I	All Yards	See Plan	OK
☐	Garage Location	5.3.1.B.3.J	Rear, Side or Secondary Street Yard	See Plan	OK
☐	Parking, Number of Spaces	Table 7.2-A	2	2	OK
☐	Parking Surfaces	7.3.2	Required	Proposed	OK - Not full width of garages.
☐	Maximum Driveway Width	7.4.2.A	24 ft.	12 ft.	OK
☐	Parking, Setbacks, From Lot Lines	7.5.1.A	See Ord.	See Plan	OK
☐	Parking, Setbacks, From Building	7.5.1.A	See ord.	See Plan	OK
☐	Parking, Principal Frontage	7.5.1.B.2	See Ord.	See Plan	OK
☐	Parking, Tandem	7.5.1.C		N/A	
☐	Parking, Safety of Design	-		N/A	
☐	Parking Lot Perimeter Landscape	8.1.3	N/A		
☐	Parking Lot Interior Landscape, Percent	8.1.5.A	N/A		
☐	Parking Lot Interior Landscape, Tree Distribution	8.1.5.B	N/A		
☐	Landscape Islands	Distribution	8.1.5.C.1	N/A	
☐		Island Dimensions	8.1.5.C.2	N/A	
☐		Shade Trees Required	8.1.5.C.3	N/A	
☐	Landscape Islands	Distribution	8.1.5.C.1	N/A	
☐		Island Dimensions	8.1.5.C.2	N/A	
☐		Shade Trees Required	8.1.5.C.3	N/A	
☐	Parking Lot Interior Landscape, Stormwater Integration	8.1.5.E	N/A		
☐	Parking, Bumpers	-	N/A		
☐	Parking, Demarcation	7.5.1.C.2		N/A	
☐	Parking, Illumination	-	N/A		
☐	Stacking, Number of Spaces	Table 7.5.3-A		N/A	
☐	Stacking, Design	7.5.3.C			
☐	Loading, Number of Spaces	Table 7.5.4-A		N/A	
☐	Loading, Location	7.5.4.B			
☐	Loading, Screening	7.5.4.D			
☐	Loading, Dimensions	7.5.4.E			
☐	Number of Accessible Parking Spaces	Table 7.6-A		N/A	
☐	Accessible Parking Space, Dimensions	7.6.5 & 7.6.6			

Parking Space Requirements	Unit of Measurement	Computation	Spaces Required
Building Use			
Two-Family Dwellings	1 per Unit	2 Units x 1 = 2	2
		TOTAL:	2

Article 6 Special District-Wide Regulations		Section	Permitted/ Required	Proposed/ Existing	Remarks
☐	Limited Activity Buffer	6.4.2			
☐	Wetlands, No-Touch Buffer	6.4.3.C	10 ft.	N/A	
☐	Standard Structural Setback		25 ft.		
☐	Wetlands, No-Touch Buffer	6.4.3.D	25 ft.	N/A	
☐	High Priority Structural Setback		50 ft.		
☐	*Other*	6.4			

Article 8 Site and Landscaping Standards		Section	Permitted/ Required	Proposed/ Existing	Remarks
☐	Landscaping, Minimum Planting Size	8.1.1.D		N/A	
☐	Landscaped Buffer Yards, Buffer Yard Type Standards	Table 8.1.2-A		N/A	
☐	Landscaped Buffer Yards, District Boundaries	Table 8.1.2-B		N/A	
☐	Landscaped Buffer Yards, Use Abutting R or MX District Boundaries	Table 8.1.2-C		N/A	
☐	Fences and Walls	8.2			
☐	Fence Height	Front and Street Yard	4 ft.	4 ft.	OK - 4' Retaining Wall
☐		Side Yard	6 ft.	6 ft.	OK - 6' Retaining Wall
☐		Rear Yard	8 ft.	8 ft.	OK - 8' Retaining Wall
☐	Height of Fences on Walls	8.2.4.A	4 ft.	See Plan	OK
☐	Setback of Retaining Walls > 4 ft.	8.2.4.B	10 ft.	See Plan	OK
☐	Screening of Dumpster & Utilities	Table 8.3-A		N/A	
☐	Visibility at Intersections	8.4	30 ft.	N/A	
☐	Site Lighting Standards	8.5			
☐	Open Spaces	8.6		N/A	

Section 8.7: Planned Developments	Proposed/ Existing	Remarks
☐	N/A	

*See Planned Development Standards Review Sheet

Article 9: Sign Standards	Proposed/ Existing	Remarks
☐	None	OK

*See Sign Standards Review Sheet

Additional Information: Driveway layout does not provide adequate entry into garages. Any additional pavement will exceed the 25% limit allowed.



City of Manchester
Planning & Community Development
One City Hall Plaza-West Wing
Manchester, NH 03101
(603) 624-6475
www.manchesternh.gov

Jeffrey D. Belanger, AICP
Director

Pamela H. Goucher, AICP
Deputy Director Planning & Zoning

Michael J. Landry, PE, Esq.
Deputy Director Building Regulations

VARIANCE CRITERIA

Complete this form and attach 10 copies along with any supplemental material that would support your appeal.

Deadline for Next Hearing: _____

Property Location: 374 Thornton Street

Owner: Jonathan & Krystal Venturini

Address: 374 Thornton Street

Phone #: _____

Manchester, NH 03102

Email: [REDACTED]

Applicant: Same as owner

Address: _____

Phone #: _____

Email: _____

Relief Sought From Section(s): 5.3.1.(B).3.G. - Minimum Buildable Area

1. The variance would not be contrary to the public interest because: See attached exhibit A

2. The spirit of the ordinance is observed because: See attached exhibit A

3. Substantial justice would be done because: See attached exhibit A

4. The values of surrounding properties would not be diminished because: See attached exhibit A

5. Literal enforcement of the provisions of the ordinance would result in unnecessary hardship if:

- (A) Owing to the following special conditions of the property that distinguish it from other properties in the area:
- i. No fair and substantial relationship exists between the general purposes of the ordinance provisions and the specific application of that provision to the property; **and**
 - ii. The proposed use is a reasonable one.

Or (B) Owing to the following special conditions of the property that distinguish it from other properties in the area, the property cannot be reasonably used in strict conformance with the ordinance, and a variance is therefore necessary to enable a reasonable use of it.

See attached exhibit A

J. Venturini
Applicant Signature

Jonathan Venturini
Print Name

8-10-2020
Date

Exhibit A
Variance Application
374 Thornton Street, Manchester, New Hampshire

BACKGROUND:

The owners of record and applicants for this variance request are Jonathan and Krystal Venturini of 374 Thornton Street in Manchester, New Hampshire. The subject property is Lot 48 on Manchester Tax Map 389. The parcel is located on the west side of Thornton Street between Wayne Street and Janelle Avenue. It has 227' of frontage and a parcel area of 42,157 SF (of which 14,852 SF is buildable). There is an existing 1-1/2-story single family dwelling on the property which is the owner's residence. City records indicate this building was constructed in 1911 and the property is located in the MX-1 zoning district. For single family houses, this district requires 50' of lot width, 5,000 SF of lot area, a 10' minimum and 20' maximum front setback, 10' side setback (one side can be reduced to 5' if the total is 20') and a rear setback of 20'. For duplexes, this district requires 60' of lot width (50' if alley loaded), 6,000 SF of lot area (5,000 SF if alley loaded), a 10' minimum and 20' maximum front setback, 10' side setback (one side can be reduced to 5' if the total is 20') and a rear setback of 20'. The applicant purchased the property in May of 2023 from a family member who purchased the property in 2006. The existing house and one of the 2 detached garages are located on the southern part of the lot. There is a second detached garage north of the house. The north and west parts of the parcel have a relatively steep slope that goes up to Columbus Street. The applicant would like to subdivide the parcel to create a new 2-family building lot with 121' of frontage, and 13,955 SF but only 1,812 SF of buildable area. Although we do not have the required 6,000 SF of buildable area required by the Zoning Ordinance, we believe that with proper planning and the use of retaining walls there is sufficient space for the proposed duplex and the ancillary improvements associated with this use. The existing garage would be demolished as part of this subdivision and a portion of the driveway to the remaining garage would be reconstructed. The new lot would need zoning relief for inadequate buildable area but would meet all the other requirements of the zoning ordinance and would be consistent with the surrounding area.

The intent of the steep slope section of the ordinance is to prevent creating lots that cannot be built on and to ensure that any new construction does not create problems for abutters. In this instance, the proposed building would be located at the toe of the slope so the construction of a new duplex will not negatively impact the downstream abutters. As part of the subdivision process, DPW will be reviewing the application and any proposed grading to make sure that the improvements do not cause any runoff issues onto the street. We have shown preliminary grading for the rear of the parcel to create a backyard by a series of three retaining walls. Should the variance be approved, we would finalize a grading plan for the proposed driveway as part of our application. This is not normally part of the process for a road front subdivision but we understand this is a unique situation.

SECTIONS OF THE ZONING ORDINANCE NEEDING RELIEF:

LOT 389-48B:

Section 5.3.1(B)3.G – 1,812 SF buildable area where 6,000 SF is required

1. Granting the variance would not be contrary to the public interest because:

Approval of this variance request would allow the applicant to create a new building lot. The remainder lot would meet all the zoning requirements but the proposed lot would require a variance for inadequate buildable area. The proposed lot would be larger than the average lot in the neighborhood despite having limited buildable area. The buildable area requirement exists to ensure that proposed lots are capable of being developed in

a safe and practical way. We believe that the proposed improvements can be constructed using retaining walls and drive under garages. As the grading part of this application will receive further scrutiny during the subdivision process to ensure no negative consequences, we believe that approval of this variance would not be contrary to the public interest.

2. Granting the variance would not be contrary to the Spirit of the Zoning Ordinance because:

The intent of the zoning ordinance is to prevent overcrowding and unsafe development. The existing neighborhood has a ridge line with a significant grade change. Several lots at the top and bottom of the ridge are also undersized in terms of buildable area but were created before the buildable area requirement existed. We believe that the proposed lot is viable through the use of drive under garages and retaining walls. Subdividing an existing oversized lot of record into two oversized lots will not change the character of the neighborhood in any way. Consequently, we believe this request is reasonable, within the spirit of the ordinance and should be approved.

3. By granting the variance, substantial justice would be done because:

Approval of these variance requests would allow the applicant to create a new duplex building lot from the undeveloped portion of the property that is consistent with the zoning and surrounding area. Approval of this variance request and subsequent subdivision would create two new residential units at a time where dwelling units are in high demand. The existing lot is oversized and underutilized by the existing single-family residence. The proposed duplex on the new lot would be in keeping with the character of the area as there are existing two and three-family residences in the neighborhood. We see no benefit to the public should the variance request be denied. As the loss to the applicant would greatly outweigh any perceived public gain, it is our opinion that the statutes specify that the variance should be approved.

4. The proposed use would not diminish surrounding property values because:

The applicant seeks a variance to allow them to subdivide their property and create one new MX-1 building lot with less than 6,000 SF of buildable area but similar to other properties in the neighborhood. The proposed dwelling would be equal or higher in value of the surrounding area because new houses generally tend to appraise higher. The value of existing dwelling will not significantly change should the subdivision move forward. As such, approval of this variance would not reduce the value of surrounding properties.

5. Literal enforcement of the provisions of the ordinance would result in unnecessary hardship if, owing to the following special conditions of the property that distinguish it from other properties in the area:

- (1) No fair and substantial relationship exists between the general public purposes of the ordinance and the specific application to the Property;

The applicant wishes to subdivide the parcel to create one new building lot, leaving the existing house on a reconfigured remainder parcel. The proposed lot would need a variance for inadequate buildable area. Although the new lot would lack buildable area by the current zoning ordinance, it would not be out of character with the surrounding area.

It is our opinion that allowing the applicant to subdivide his property and develop the new lot as requested is a reasonable use of the property and as such, no fair and substantial relationship exists between the general purposes of the zoning ordinance and the specific application to the Property.

(2) The proposed use is reasonable;

Single-family and duplex residences are allowed uses by right in the MX-1 zoning district. The applicant is asking for relief from the current zoning ordinance to be allowed to subdivide the parcel to create a new lot with inadequate buildable area in order to construct a duplex. We have tried to design the improvements to ensure no downslope drainage issues and still provide a functioning yard. This will require the use of retaining walls and garage unders but we feel it is viable. As such, it is our opinion that the proposed use is reasonable.

CURRENT OWNER		TOPO	UTILITIES	STRT / ROAD	LOCATION	CURRENT ASSESSMENT				2017 MANCHESTER, NH VISION											
VENTURINI, JONATHAN 374 THORNTON ST MANCHESTER NH 03102		1 Suitable	1 All Public	1 Paved	1 Urban	Description	Code	Appraised	Assessed												
		1 Level		5 Curb & Gutter		RESIDNTL	1010	210,500	210,500												
						RES LAND	1010	110,400	110,400												
SUPPLEMENTAL DATA						RESIDNTL	1010	25,100	25,100												
Alt Prcl ID Land Adjus NO Voided NO Total SF 33658 TIF Zone Frontage/D No GIS ID 389-48						RAD OR C CAD = 642 TIF Origina TIF Note Land Class R Parcel Zip 03102-3652 Assoc Pid#		Total		346,000	346,000										
RECORD OF OWNERSHIP		BK-VOL/PAGE	SALE DATE	Q/U	V/I	SALE PRICE	VC	PREVIOUS ASSESSMENTS (HISTORY)													
VENTURINI, JONATHAN VENTURINI, JOSEPH WEST POINT TRUST MATERAS, KEITH B LEBLANC, LUCILLE M		9700 1187	05-16-2023	U	I	248,000	38	Year	Code	Assessed	Year	Code	Assessed V	Year	Code	Assessed					
		7622 1764	01-27-2006	Q	I	253,000	00	2025	1010	210,500	2024	1010	210,500	2023	1040	222,700					
		6815 2134	11-30-2002	U	I	0	00		1010	110,400		1010	110,400		1040	110,400					
		5963 0604	06-30-1998	U		145,000	04		1010	25,100		1010	25,100		1040	19,500					
		5311 1459	01-14-1992	U		4,000	04	Total		346,000	Total	346,000	Total	352,600							
EXEMPTIONS			OTHER ASSESSMENTS					This signature acknowledges a visit by a Data Collector or Assessor													
Year	Code	Description	Amount	Code	Description	Number	Amount	Comm Int	APPRAISED VALUE SUMMARY Appraised Bldg. Value (Card) 210,500 Appraised Xf (B) Value (Bldg) 0 Appraised Ob (B) Value (Bldg) 25,100 Appraised Land Value (Bldg) 110,400 Special Land Value 0 Total Appraised Parcel Value 346,000 Valuation Method C Total Appraised Parcel Value 346,000												
Total			0.00																		
ASSESSING NEIGHBORHOOD																					
Nbhd		Nbhd Name		B		Tracing		Batch													
570																					
NOTES																					
BUILDING PERMIT RECORD																					
Permit Id	Issue Date	Type	Description	Amount	Insp Date	% Comp	Date Comp	Comments	Date	Id	Type	Is	Cd	Purpost/Result							
2024-01007	03-12-2024	CU	Change Use	0	03-20-2024	100	03-20-2024	Single family home conversion	03-20-2024	RG			05	Measur/ BP Or UC							
06-0374		RS	Residential	12,000	04-01-2006	100	04-01-2006	REMODEL KTH AND BTHS	04-01-2006	KM			05	Measur/ BP Or UC							
06-0349		RS	Residential	4,000	04-01-2006	100	04-01-2006	REPAIR PORCHES	01-04-2006	TB			00	Meas & Int Insp.							
									10-07-2000	DD			00	Meas & Int Insp.							
									07-12-2000	RT			01	Meas/Int Estimate							
									11-07-1990				20	Sale Inspection							
LAND LINE VALUATION SECTION																					
B	Use Code	Description	Zone	Land Type	Land Units	Unit Price	I. Factor	Site Index	Cond.	Nbhd.	Nbhd. Adj	Notes	Location Adjustment	Adj Unit P	Land Value						
1	1010	SINGLE FAM			42,133 SF	2.76	1.00000	1	1.00	570	0.950			1.0000	2.62	110,400					
Total Card Land Units															1 AC	Parcel Total Land Area		1	Total Land Value		110,400

Property Location 374 THORNTON ST
Vision ID 11360 Account # 13321635

Map ID 0389/ / 0048/ /
Bldg # 1

Bldg Name
Sec # 1 of 1 Card # 1 of 1

State Use 1010
Print Date 8/5/2026 2:12:47 PM


CONSTRUCTION DETAIL			CONSTRUCTION DETAIL (CONTINUED)		
Element	Cd	Description	Element	Cd	Description
Style:	06	Conventional			
Model	01	Residential			
Grade:	03	Average			
Stories:	1.75	1 3/4 Stories			
Occupancy	1				
Exterior Wall 1	25	Vinyl Siding			
Exterior Wall 2					
Roof Structure:	03	Gable/Hip			
Roof Cover	03	Asphalt			
Interior Wall 1	05	Drywall			
Interior Wall 2	03	Plastered			
Interior Flr 1	14	Carpet			
Interior Flr 2					
Heat Fuel	03	Gas			
Heat Type:	05	Hot Water			
AC Type:	01	None			
Total Bedrooms	05	5 Bedrooms			
Total Bthrms:	2				
Total Half Baths	0				
Total Xtra Fixtrs					
Total Rooms:	10				
Bath Style:	02	Average			
Kitchen Style:	02	Average			
MHP					


CONDO DATA			
Parcel Id		C	Owne
		B	S
Adjust Type	Code	Description	Factor%
Condo Flr			
Condo Unit			

COST / MARKET VALUATION	
Building Value New	323,856
Year Built	1911
Effective Year Built	1986
Depreciation Code	GD
Remodel Rating	
Year Remodeled	
Depreciation %	35
Functional Obsol	0
External Obsol	0
Trend Factor	1
Condition	
Condition %	
Percent Good	65
RCNLD	210,500
Dep % Ovr	
Dep Ovr Comment	
Misc Imp Ovr	
Misc Imp Ovr Comment	
Cost to Cure Ovr	
Cost to Cure Ovr Comment	

OB - OUTBUILDING & YARD ITEMS(L) / XF - BUILDING EXTRA FEATURES(B)										
Code	Description	L/B	Units	Unit Price	Yr Blt	Cond. Cd	% Gd	Grade	Grade Adj.	Appr. Value
FGR7	GARAGE W/ A	L	660	62.00	2016		50		0.00	20,500
FGR1	GARAGE-AVE	L	288	32.00	2016		50		0.00	4,600

BUILDING SUB-AREA SUMMARY SECTION						
Code	Description	Living Area	Floor Area	Eff Area	Unit Cost	Undeprec Value
BAS	First Floor	1,170	1,170	1,170	140.75	164,673
FEP	Porch, Enclosed, Finished	0	25	18	101.34	2,533
FOP	Porch, Open	0	136	27	27.94	3,800
FUS	Upper Story, Finished	168	168	168	140.75	23,645
TQS	Three Quarter Story	684	912	684	105.56	96,270
UBM	Basement, Unfinished	0	1,170	234	28.15	32,935
Ttl Gross Liv / Lease Area		2,022	3,581	2,301		323,856

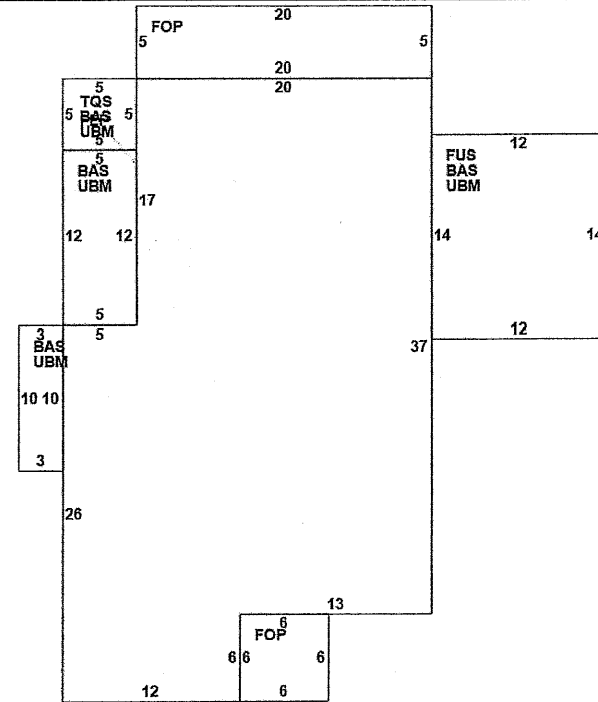

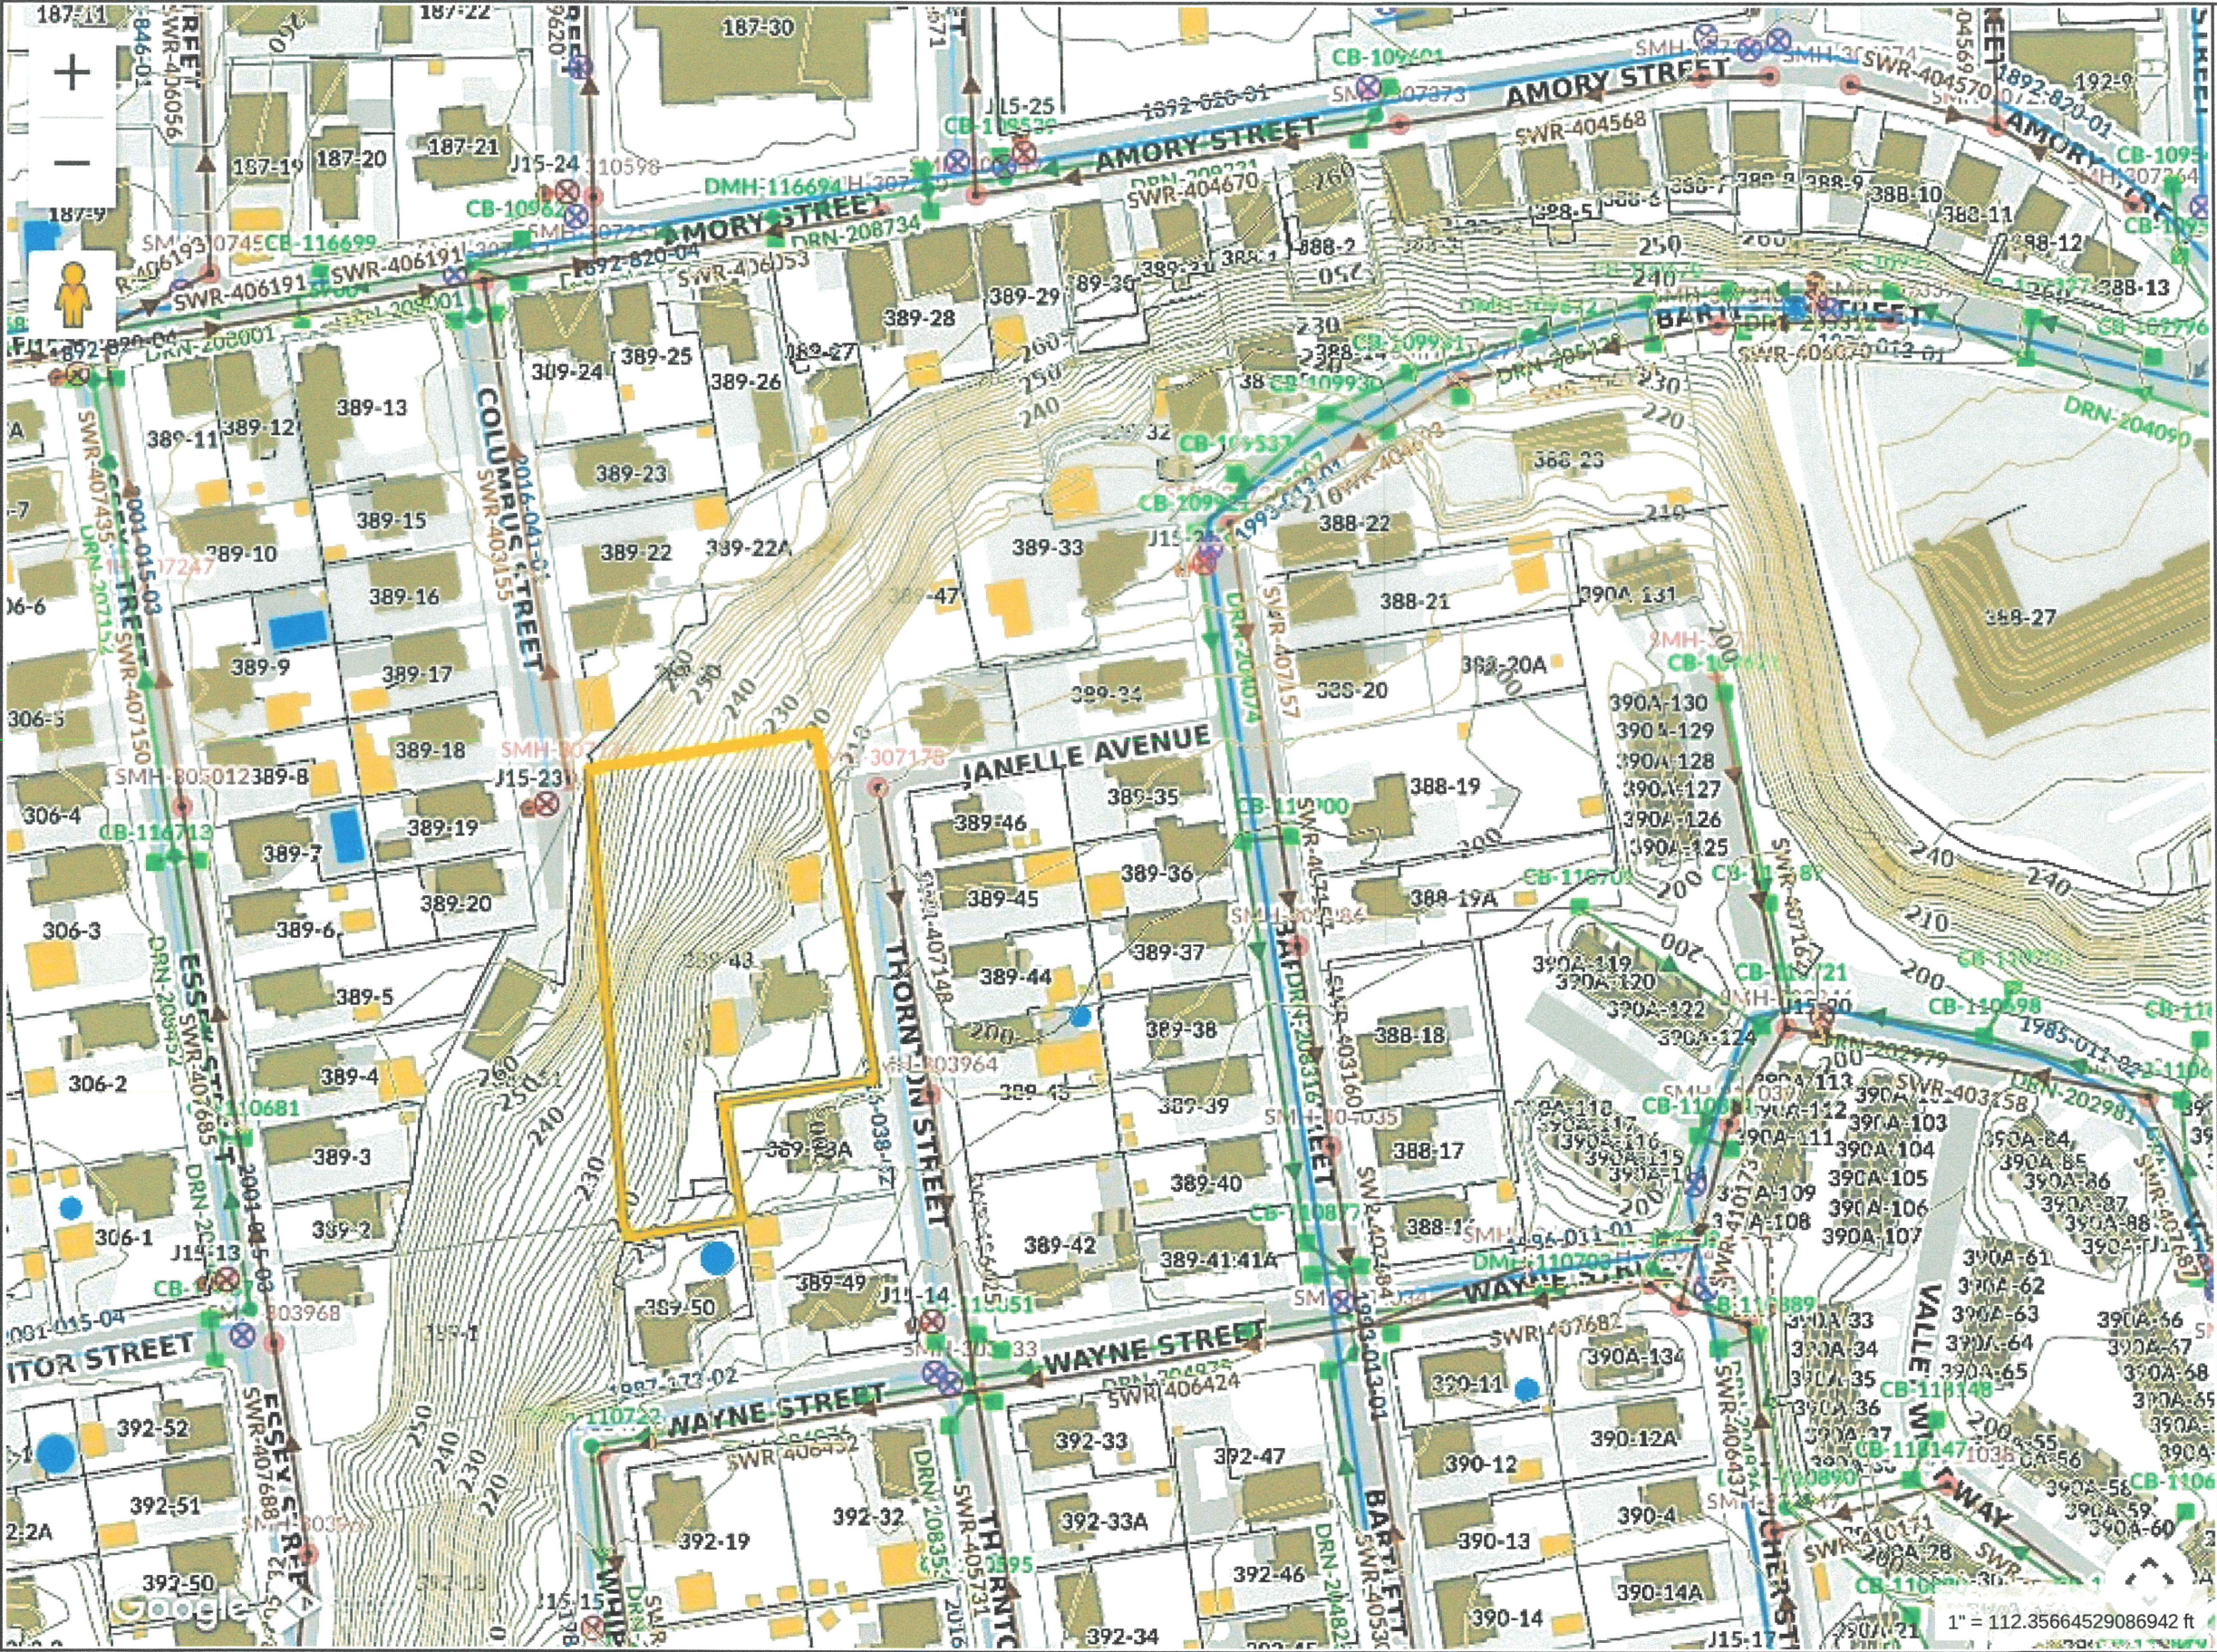

Property Information
ParcelID 0389-0048
Location 374 THORNTON ST
Owner VENTURINI, JONATHAN




MAP FOR REFERENCE ONLY
NOT A LEGAL DOCUMENT


City of Manchester, NH makes no claims and no warranties, expressed or implied, concerning the validity or accuracy of the GIS data presented on this map.

Geometry updated Daily
Data updated Daily


Print map scale is approximate. Critical layout or measurement activities should not be done using this resource.

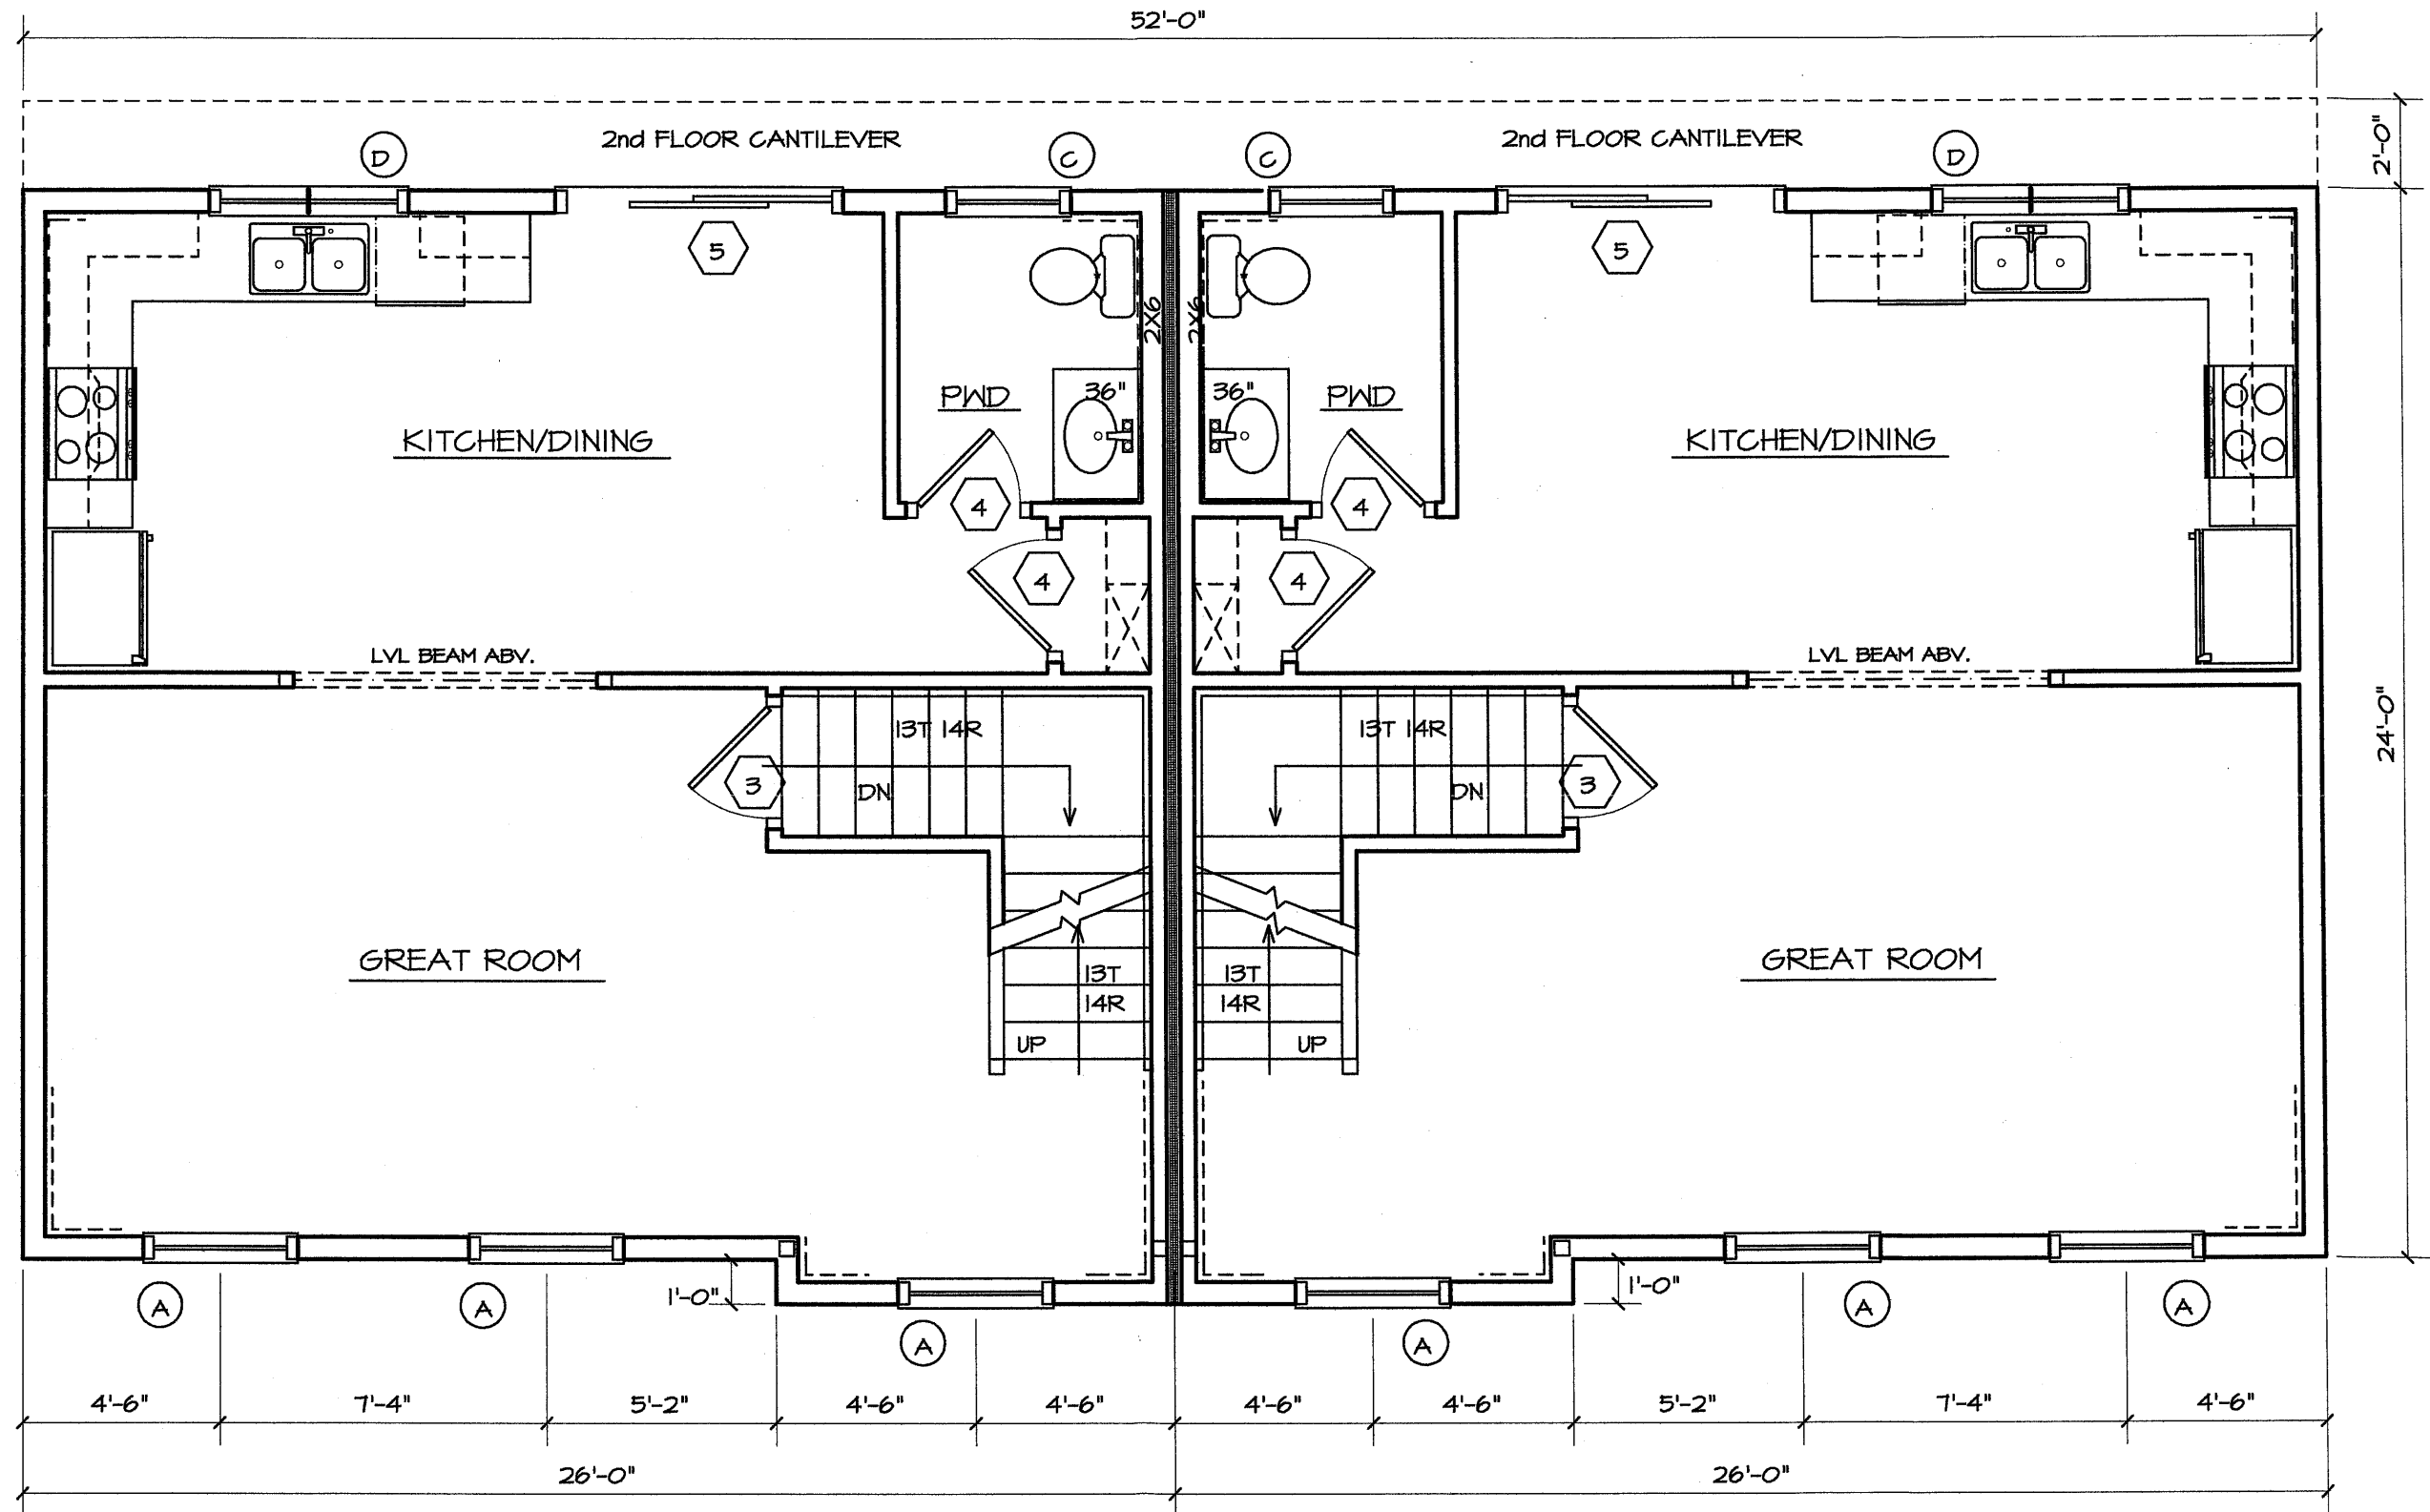

1 FIRST FLOOR PLAN
A3 SCALE: 1/4" = 1'-0"

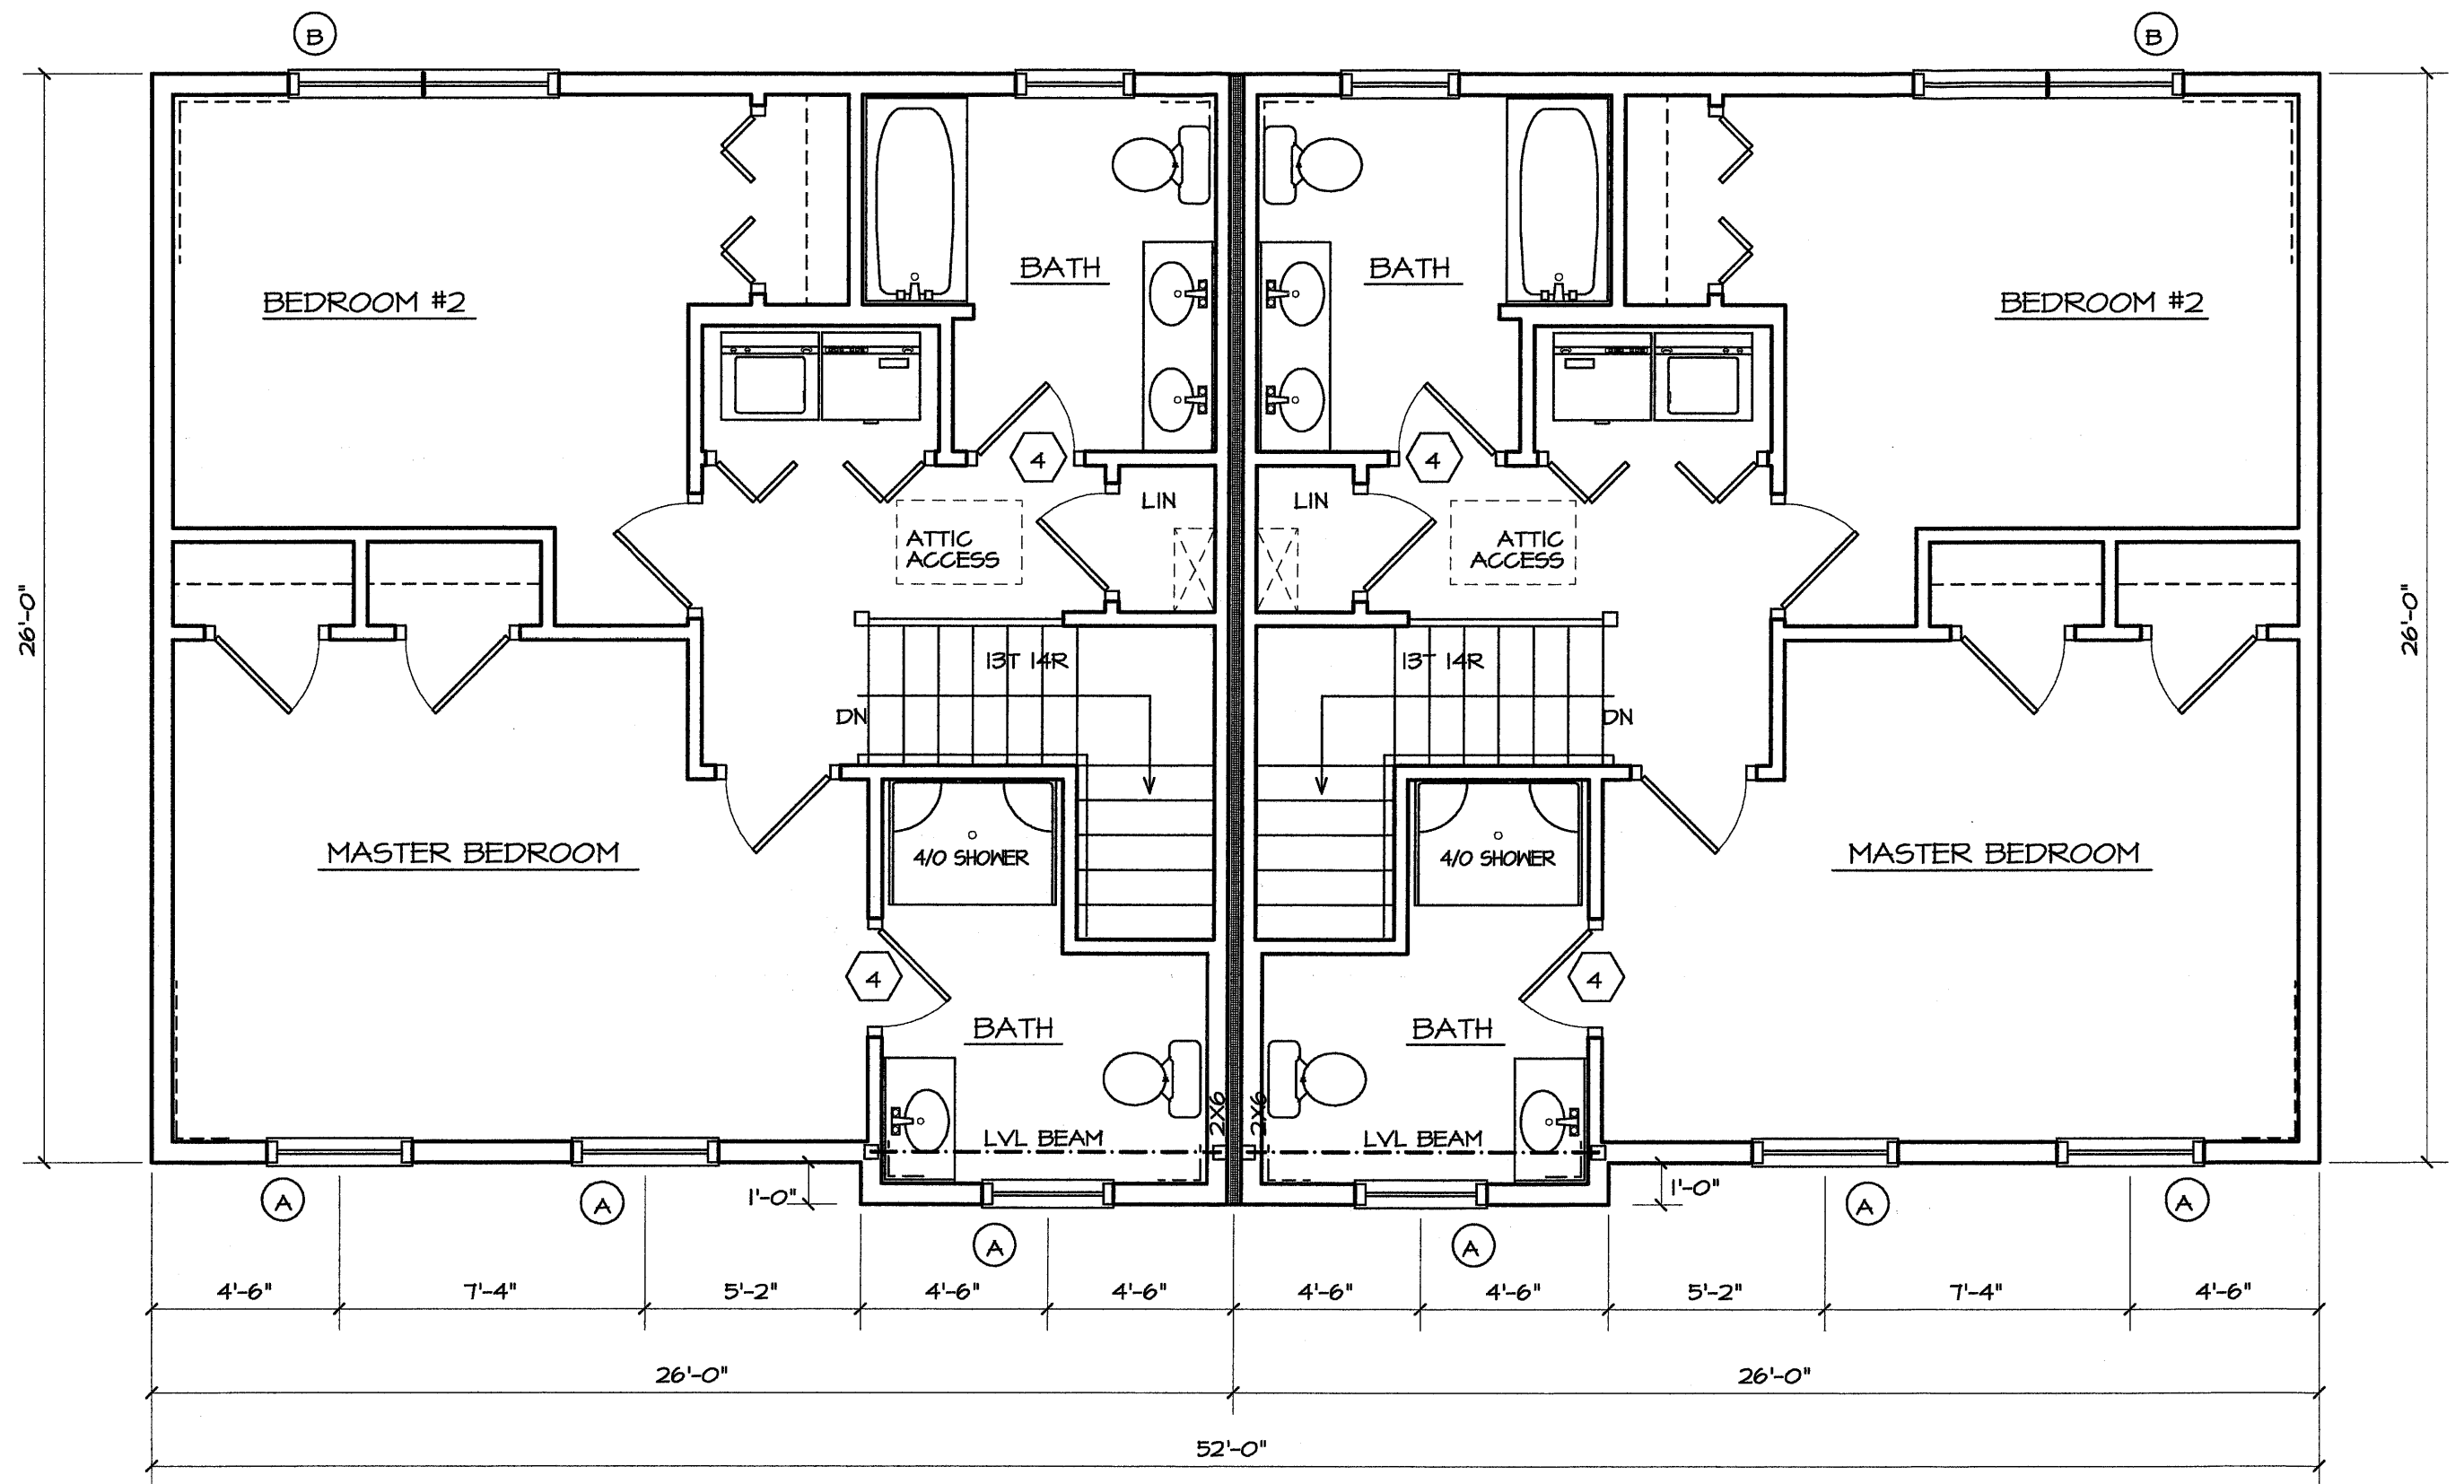

1 SECOND FLOOR PLAN
A4 SCALE: 1/4" = 1'-0"

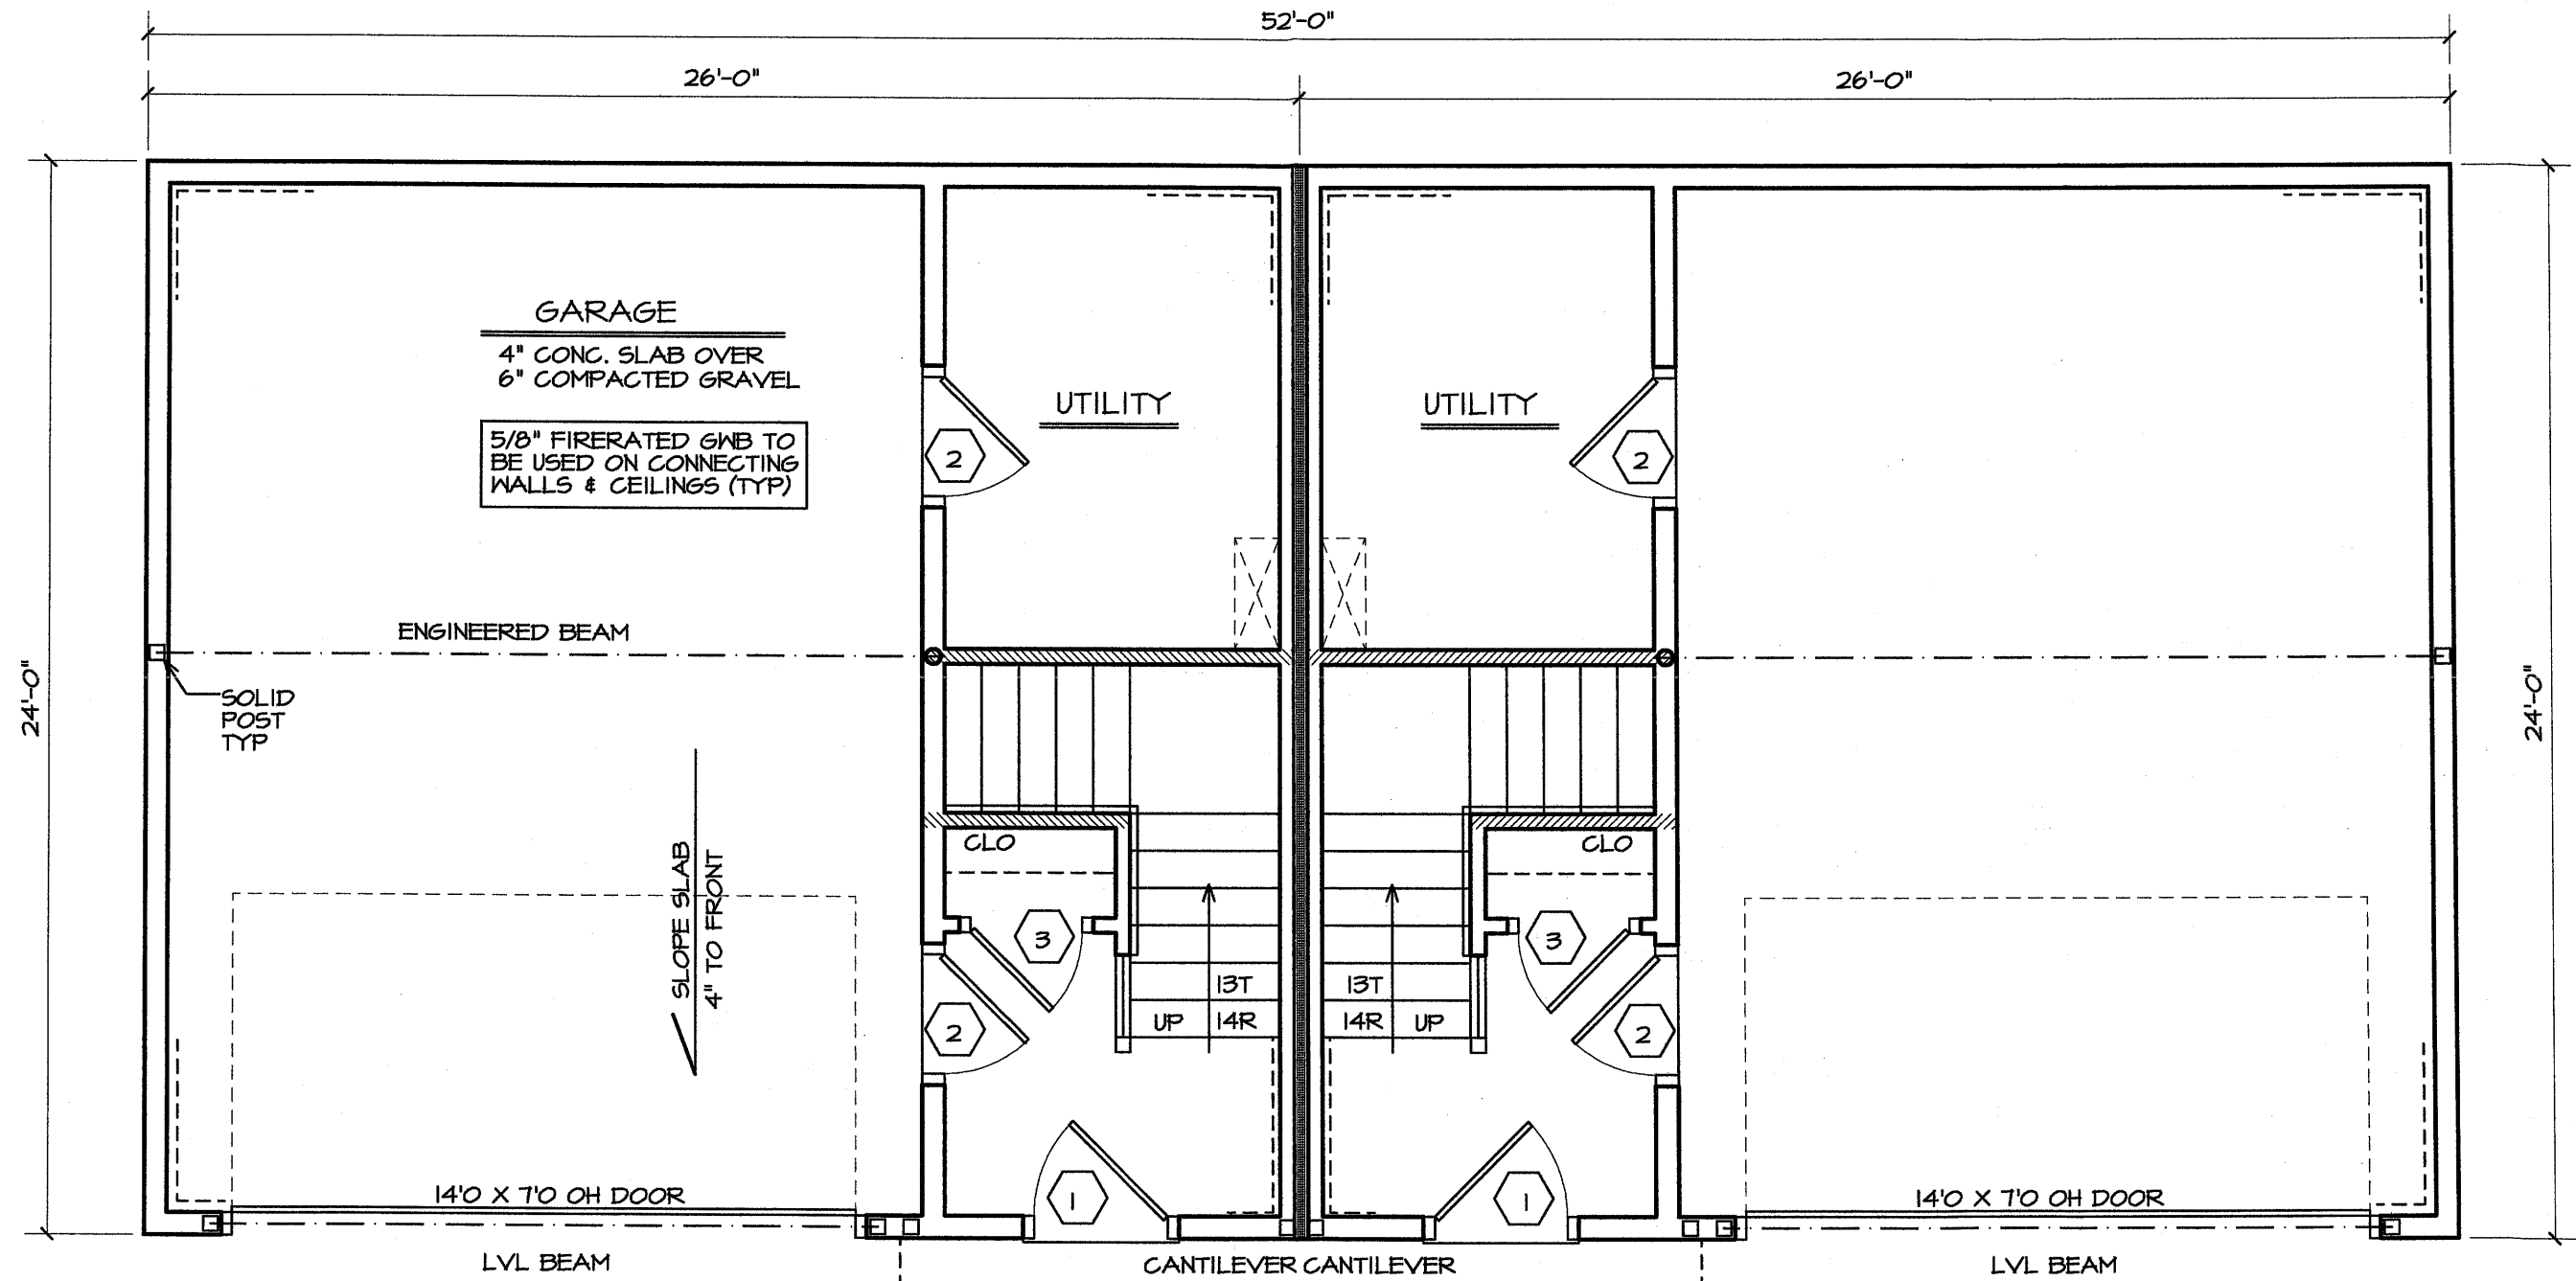


1 LOWER LEVEL PLAN
A6 SCALE: 1/4" = 1'-0"



1.) "SUBDIVISION PLAN TAX MAP 389 LOT 48 THORNTON STREET
MANCHESTER, NH" PREPARED FOR WEST POINT TRUST BY
DUVAL SURVEY INC. DATED MAY 2, 2005. H.C.R.D. PLAN #34517

BUILDABLE AREA TABLE					
LOT #	LOT AREA	AREA > 25%	WETLAND AREA	EASEMENT AREA	BUILDABLE AREA
48	28,202 SF	15,162 SF	0 SF	0 SF	13,040 SF
48B	13,955 SF	12,143 SF	0 SF	0 SF	1,812 SF

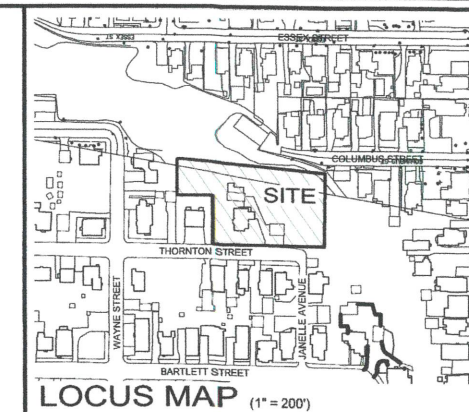

LOCUS MAP (1" = 20

1.) THE SUBJECT PARCEL IS LOT 48 ON THE CITY OF MANCHESTER TAX MAP 389. THE OWNER OF RECORD IS JONATHAN & KRYSTAL VENTURINI OF 374 THORNTON STREET MANCHESTER, NEW HAMPSHIRE. SEE HCRD V. 9700 P. 1187.

2.) THE SUBJECT PARCEL IS ZONED MX-1. FOR SINGLE FAMILY HOUSES, MINIMUM LOT SIZE IS 5,000 SQ. FT. AND MINIMUM LOT WIDTH = 50'. FOR A DUPLEX, MINIMUM LOT SIZE IS 6,000 SF (5,000 SF IF ALLEY LOADED) AND MINIMUM LOT WIDTH IS 60' (50' IF ALLEY LOADED). SETBACKS ARE AS FOLLOWS: FRONT = 10' MINIMUM, 20' MAXIMUM, TOTAL SIDE = 20' (MINIMUM SETBACK OF 5' ON ONE SIDE) AND REAR = 20'. THE SETBACKS SHOWN ARE FOR REFERENCE ONLY AND NEED TO BE VERIFIED WITH THE ZONING COMPLIANCE OFFICER.

3.) THIS PLAN IS THE RESULT OF AN ACTUAL FIELD SURVEY PERFORMED BY THIS OFFICE IN APRIL OF 2024. I, JOSEPH M. WICHERT, NHLLS #783, CERTIFY THAT THE WORK WAS PREPARED BY ME OR THOSE UNDER MY DIRECT SUPERVISION.


4.) THE INTENT OF THIS PLAN IS TO SHOW THE PROPOSED SUBDIVISION OF THE SUBJECT PROPERTY TO CREATE ONE NEW MX-1 BUILDING LOT AND RECONFIGURED REMAINDER PARCEL. THE EXISTING SINGLE FAMILY DWELLING IS AND THE NEW DWELLING WILL BE SERVICED BY MUNICIPAL WATER AND SEWER.

5.) THE SUBJECT PARCEL IS IN ZONE X (AREAS DETERMINED TO BE OUTSIDE THE 0.2% ANNUAL CHANCE FLOODPLAIN) AS SHOWN ON THE FLOOD INSURANCE RATE MAP, HILLSBOROUGH COUNTY, NEW HAMPSHIRE, MAP NUMBER 33011C0376D, EFFECTIVE DATE SEPTEMBER 25, 2009.

6.) THE VERTICAL DATUM IS NAVD 1988 AND THE HORIZONTAL DATUM IS NHSPC 1983/1992 (CITY DATUM). THE DATUM WERE ESTABLISHED USING STATIC GPS OBSERVATIONS PERFORMED BY THIS OFFICE IN APRIL OF 2024.

7.) THE UTILITY INFORMATION SHOWN IS BASED ON THE ABOVE GROUND LOCATION OF VISIBLE UTILITIES AND PLANS ON FILE AT THE MANCHESTER HIGHWAY DEPARTMENT AND VARIOUS UTILITIES, THE CONTRACTOR NEEDS TO FIELD VERIFY ALL UTILITIES PRIOR TO ANY CONSTRUCTION. THIS OFFICE DOES NOT GUARANTEE THE LOCATION AND ACCURACY OF THE UTILITY DATA. DIG SAFE SHALL BE CONTACTED 72 HOURS PRIOR TO COMMENCING ANY CONSTRUCTION (811).


8.) THE APPLICANT HAS APPLIED FOR A VARIANCE FROM SECTION 5.3.1.(B).3.G. OF THE ZONING ORDINANCE, WHICH REQUIRES 6,000 SF OF CONTIGUOUS BUILDABLE AREA.

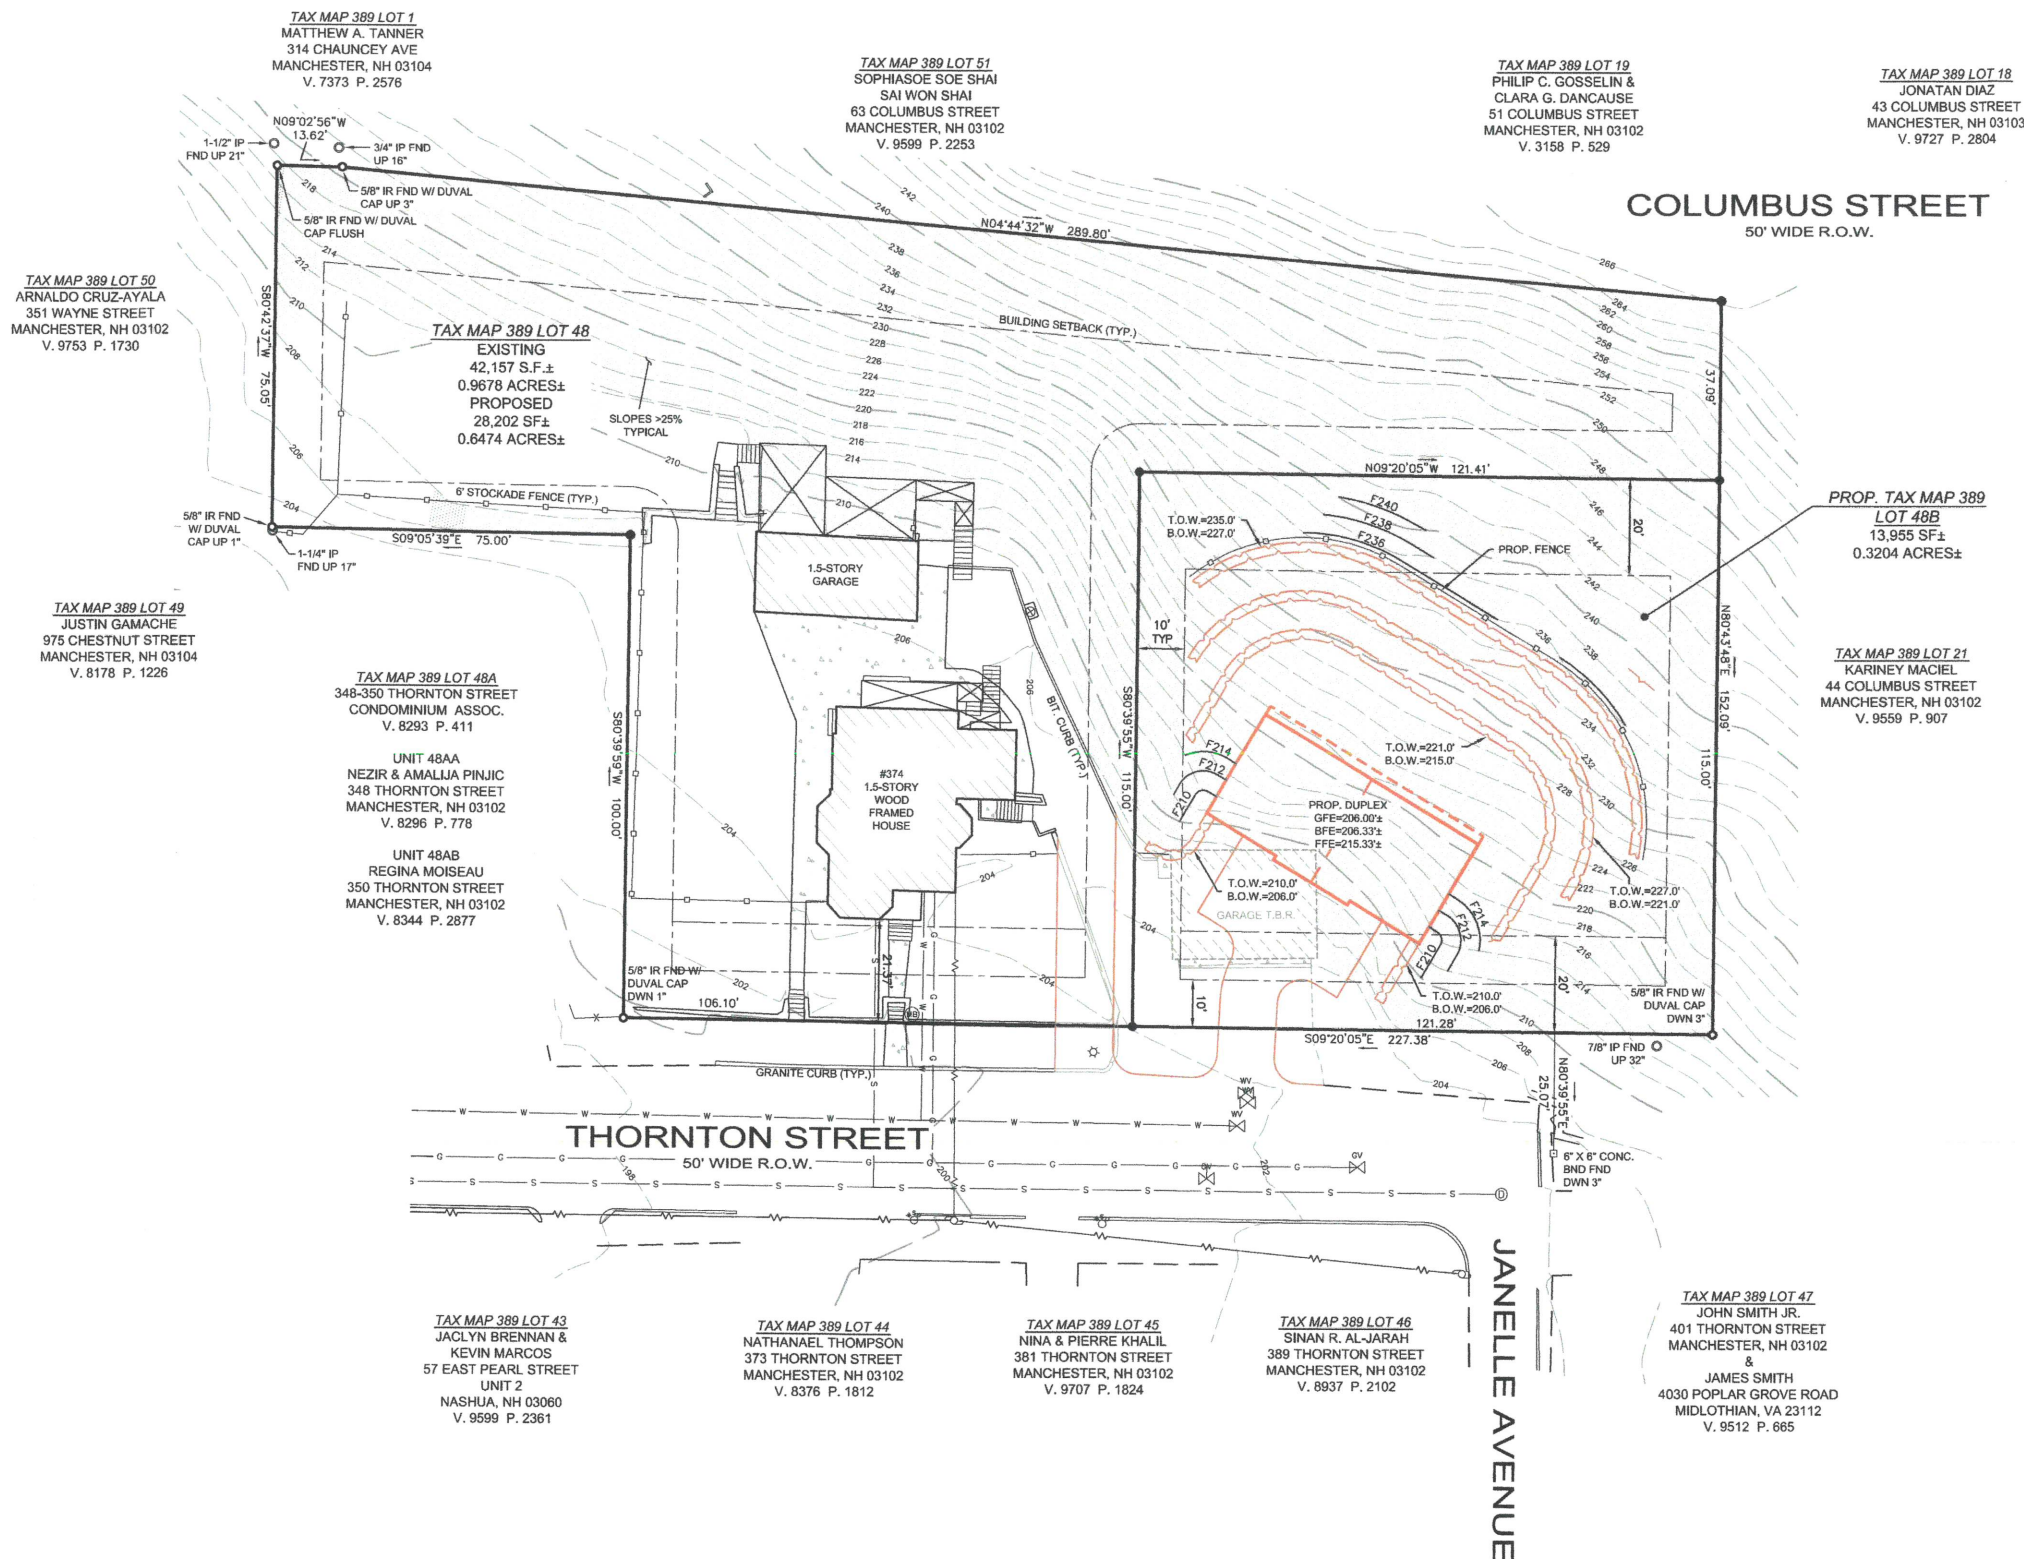


	IRON ROD FOUND
	BOUND FOUND
	FENCE POST
	SEWER MANHOLE
	UTILITY POLE
	LIGHT POLE
	WATER SHUT OFF
	WATER GATE VALVE
	WIRE MESH FENCE
	OVERHEAD UTILITY LINE
	GUY WIRE

I CERTIFY THAT THIS PLAN IS THE RESULT OF AN ACTUAL FIELD SURVEY MADE WITH A TOPCON GT 503. THE ERROR OF CLOSURE ON ALL LOT LINES WITHIN AND BORDERING THE SUBJECT PROPERTY IS BETTER THAN 1 IN 10,000.

JOSEPH M. WICHERT, LLS 11 AUG. 2024
DATE



GRAPHIC SCALE



(IN FEET)
1 inch = 20 ft.

COPYRIGHT 2024 JOSEPH M. WICHERT, L.L.S., INC.

NO.	DATE	DESCRIPTION	BY

SUBDIVISION PLAN FOR
JONATHAN & KRYSTAL VENTURINI
TAX MAP 389 LOT 48
374 THORNTON STREET
MANCHESTER, NEW HAMPSHIRE

DATE: AUGUST 3, 2026

SCALE: 1" = 20'

SUBDIVISION PLAN BY:

802 AMHERST STREET
MANCHESTER, NH 03104
TEL: (603) 647-4282 OR 736-8203
FAX: (603) 623-1910
WEB: WWW.JMWLLS.COM

Joseph M. Wicher
U.S. IN

LAND SURVEYOR & SEPTIC SYSTEM DESIGNER

SHEET S1 SHEET 1 OF 2

SEE #2010183
F.B. P. JOB #2024131-7BA

SEE #2010183